



1/3

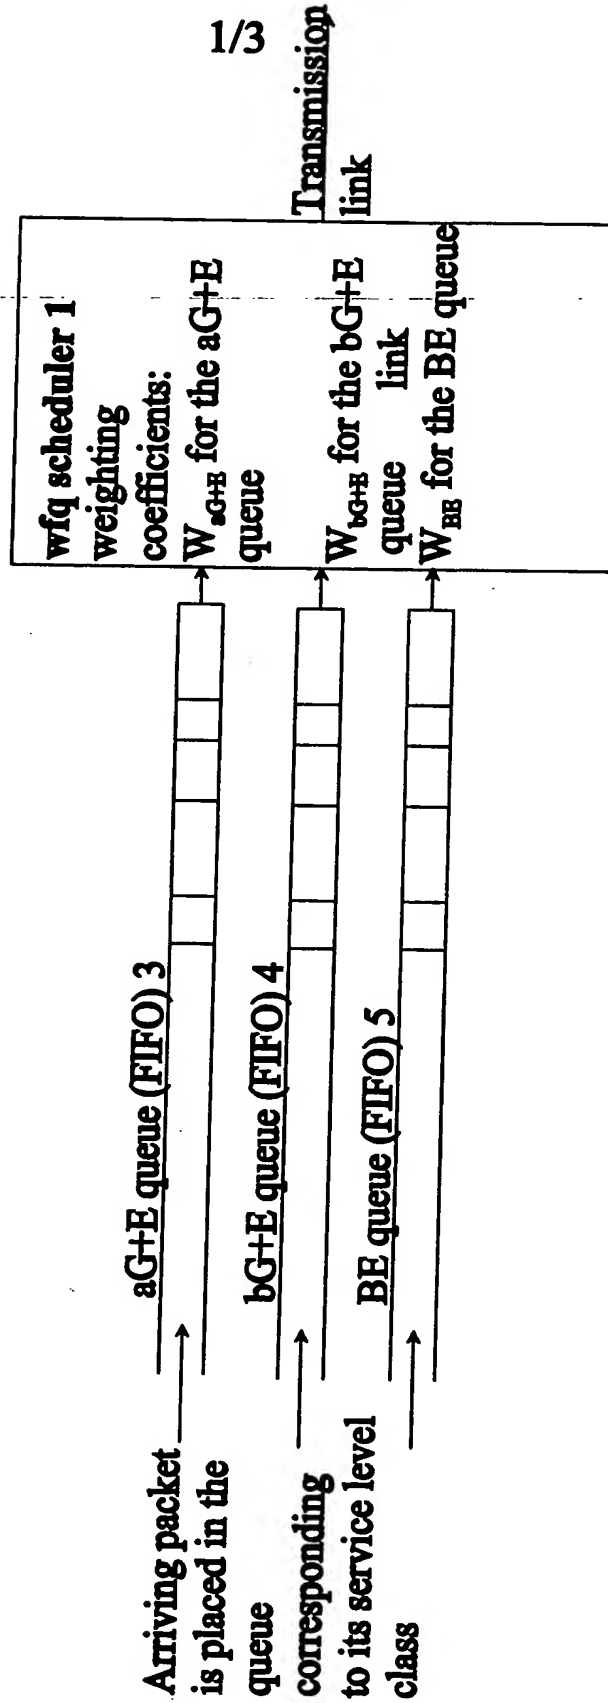

The SFQ (Start-time Fair Queuing) method referred to in source [1], for example, can be used as the wfq algorithm

Figure 1

PRIOR ART

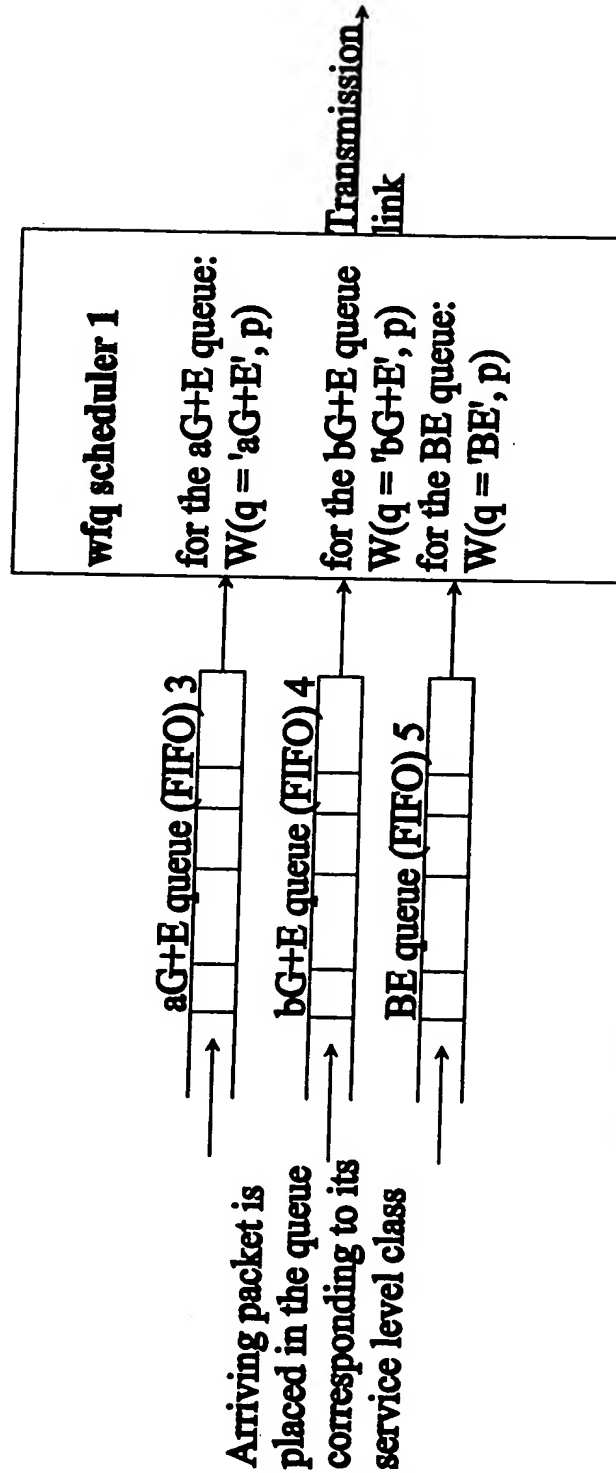

The SFQ (Start-time Fair Queuing) method referred to in source [1], for example, can be used as the afq algorithm. The weighting coefficient is determined on the basis of the variables q and p , in which q depends on the service level class (aG+E, bG+E, BE) and p , in turn, on the division of the packets into sub-groups.

Figure 2

PRIOR ART